



Product overview

TEXIPOL[®] 63-513 is a next generation **inverse emulsion synthetic** thickener with >20% bio-content.

Texipol[®] 63-513 imparts pseudoplastic rheology to aqueous compositions and is supplied as a pre-neutralised dispersion as the sodium salt of an acrylic based polymer. Texipol 63-513 shows broad pH compatibility.

Physical properties (Not to be taken as a specification)	
Appearance	Hazy to clear liquid
Specific gravity at 25°C	1.13
Inverse emulsion viscosity	27.50 dPa.s
*Thickened deionised water (3%)	>350 dPa.s
Polymer charge	Anionic


*Deionised water thickened with 3% of TEXIPOL[®] 63-513 as supplied.
Brookfield RVT, Spindle 6, 5 rpm at 25°C.

Applications

TEXIPOL[®] 63-513 is supplied as an easy to use, low viscosity liquid that gives almost instantaneous thickening when mixed directly into aqueous formulations. As the polymer is already in solution it does not require any neutralisation or pH adjustment to promote thickening.

TEXIPOL[®] 63-513 has been used to thicken various water-based adhesives and coatings systems where it gives an exceptional creamy consistency. Typical thickener dosages are probably 0.5-3.0%, though this is system dependent and higher paste viscosities may require higher addition levels.

TEXIPOL[®] 63-513 pH profile, 3% in water

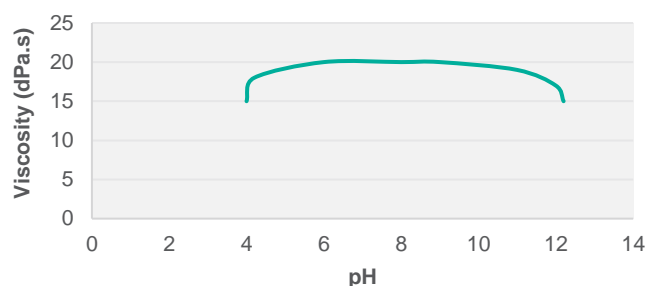

Packaging and storage

TEXIPOL[®] 63-513 is available in drums and IBCs (please check with your local representative).

TEXIPOL[®] 63-513 should be stored between 5 and 30°C in the original, unopened container in a dry, well ventilated place. Protect from freezing and direct sunlight.

Health and safety

Please see separate material safety data sheet.

© 2023 Scott Bader Company Limited, July 2023, Issue No. 3

All information on this data sheet is based on laboratory testing and is not intended for design purposes. Scott Bader makes no representations or warranties of any kind concerning this data. Due to variance of storage, handling and application of these materials, Scott Bader cannot accept liability for results obtained. The manufacture of materials is the subject of granted patents and patent applications; freedom to operate patented processes is not implied by this publication.