

Technical Data Sheet

PRODUCT OVERVIEW

TEXIPOL® 63-202 is an **inverse emulsion** thickener that imparts a pseudoplastic rheology to aqueous based compositions. It is supplied as a pre-neutralised dispersion as the sodium salt of an acrylic copolymer.

PHYSICAL PROPERTIES

(Not to be taken as a specification)


Appearance	Creamy Liquid
Specific Gravity at 25°C	1.05
Inverse Emulsion Viscosity (Brookfield RVT, Spindle 3, 20rpm at 25°C)	1500 mPa s
Thickened Deionised Water	>35000 mPa s
Polymer Charge	Anionic

*Deionised water thickened with 4% of TEXIPOL® 63-202 as supplied. Brookfield RVT, Spindle 6, 5 rpm at 25°C.

APPLICATIONS

TEXIPOL® 63-202 is supplied as an easy to use, low viscosity liquid that gives almost instantaneous thickening when mixed directly into aqueous formulations. As the polymer is already in solution it does not require any neutralisation or addition of other additives to promote thickening.

TEXIPOL® 63-202 can be used to thicken a wide variety of aqueous binder systems including; PVA, VAE, SBR, PVdC and acrylic and styrene acrylic copolymers. It has been used in various adhesive, sealant and coating formulations. Like other TEXIPOL® thickeners it can thicken systems as low as ~ pH 5, but is most efficient at pH>7. Typical thickener dosages are probably 0.5-2.0%, though this is system dependent and higher paste viscosities may require higher addition levels.

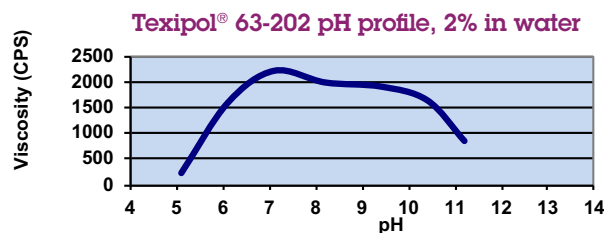

PACKAGING AND STORAGE

TEXIPOL® 63-202 is available in drums and IBCs (please check with your local representative).

TEXIPOL® 63-202 should be stored between 5 and 30°C in the original, unopened container in a dry, well ventilated place. Protect from freezing and direct sunlight.

HEALTH AND SAFETY

Please see separate material safety data sheet.

www.scottbader.com

SCOTT BADER
Making a **positive** difference

Scott Bader UK Office

Wollaston
Wellingborough
Northants
NN29 7RL
UK

Tel: +44 (0)1933 666738

email: enquiries@scottbader.com